


Frame assembly




Open up all the End and Centre 'A' frames




Push each locking arm down to secure the frame



Kit Includes:
 Carry bag (A) Horizontal tube x8 (B)
 Centre 'A' frame x1 (C) End 'A' frame x 2 (D)
 Ground peg x6 (E) and Elastic bungee cord x24 (F)



Push fit the top horizontal tubes into the 'A' frames, ensure the plastic joiners face inwards



Push fit the bottom horizontal tubes into the 'A' frames, ensure the plastic joiners face inwards

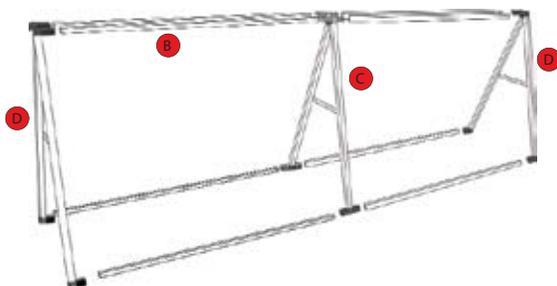

Graphic attachment



Pass the elastic bungee cord through the graphic eyelet and around the frame to secure
 Corner eyelets require a bungee cord loop around the top and the side of the frame to secure

Ground peg fixing



To secure the frame to grassed areas, push or hammer the ground peg into the ground



Ensure the ground peg covers the horizontal tube

hardware specifications	graphic specifications	additional info
Assembled Dimensions (mm) 1000 x 2500 frame 975 (h) x 2500 (w) x 640 (d) approx 38.39" (h) x 98.43" (w) x 25.20" (d) approx 1250 x 3000 frame 1200 (h) x 3000 (w) x 795 (d) approx 47.24" (h) x 118.11" (w) x 31.30" (d) approx Weight (including carry bag): 1000 x 2500 frame 8kg (17.6lbs) approx. 1250 x 3000 frame 9kg (19.8lbs) approx.	Visible Graphic Dimensions (mm): As above diagrams Substrate: Lightweight outdoor banner material (solid or mesh type substrates) Eyelets: Graphic requires 8 off eyelets with 11.5mm (0.45") recommended minimum internal diameter.	Recommended Accessories: 1250mm x 150mm diameter cardboard/tube carry bag for transporting graphics 1000 x 2500 Extension kit 1250 x 3000 Extension kit

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE